


PLL LED LAMP SPECIFICATIONS



| Specifications | | | |
|-------------------------------|--|--------------|-------------|
| Product name | Imag-12W-2G11-317MM-S3528-N180-1G | | |
| Product Description | The PLL LED lamp has a 2G11 lamp base, it can replace conventional PLL CFL, and is widely used for general lighting. | | |
| Certification | CE RoHS | | |
| Lamp Base | 2G11 | | |
| Total Power(W) | 12W | | |
| Input Voltage | 85 to 265 VAC | | |
| Rated Frequency | 50-60Hz | | |
| LED Current | 20mA | | |
| LED type | SMD3528 LED | | |
| Color Rendering Index(Ra) | >75% | | |
| Number of LEDs | 180 pcs | | |
| LED luminous flux(at 20mA) | 6-7 lm | | |
| Color | Cool White | Nature White | Warm White |
| Color Temp(CCT) | 5500K-6500K | 3700K-4300K | 2700K-3200K |
| Luminous Output(lm) | 750±15% lm - 1050±15% lm | | |
| Beam Angle | 170 degrees | | |
| Life Span | Rated 50,000 hours under standard test conditions | | |
| Operation Temperature | -20°C ~ +60°C | | |
| Storage Temperature | -20°C ~ +60°C | | |
| Use | Indoor | | |
| Dimmable | No | | |
| Replaceable Power Supply | No | | |
| Material | | | |
| LED Brand | Epistar or equivalent | | |
| Housing | Aluminum | | |
| Housing Color | Silver | | |
| Optics | PC | | |
| Packing | | | |
| Product Weight(kg) | 0.18 | | |
| Packing Dimension((LxWxH)(cm) | 50*39*18 | | |
| PCs/Box | 50 pcs | | |
| Gross Weight(kg) | 12 | | |
| Net Weight(kg) | 9 | | |

Dimension

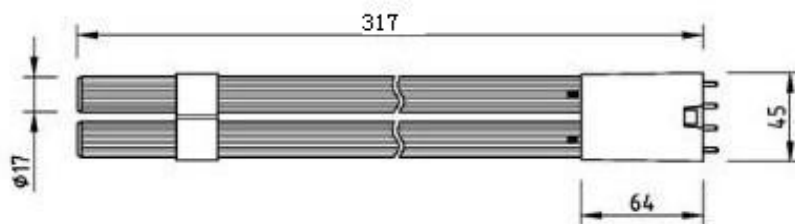

Specification is subject to change without notice. Actual values may vary from stated figures. We will not be liable for losses arising from the use of the specifications.

© Huge Inventions. Imag is the trademark of Huge Inventions. All rights reserved.